


Measuring your windows for 5 or 6 Pane Horizontal Sliders

When placing your enquiry, we highly recommend you follow the measuring instructions as detailed below. Unfortunately, we are unable to accept responsibility for any problems which may arise from the supply of inaccurate or misinterpretation of information.

To assist with the measuring and installation tolerances, we suggest you allow 10mm clearance which will accommodate inaccuracies within the structure of the window. Taking several measurements across the height and width also helps to establish an average dimension. You may wish to allow less than 10mm but please be advised this may require some additional installation work. It is better for our unit to be slightly too small than too large, gaps can be covered by the edging trim, too large and it may not be possible to adjust to fit. If in any doubt please contact us.

IMPORTANT; Building Regulations demand that if a window is below 800mm from the internal floor or 300mm from a door, toughened or laminated glass must be specified and installed.

Should you have any queries or concerns regarding the measuring, installation or specification details then please contact us. Should you be able to supply digital photographs this would greatly assist us with your query.

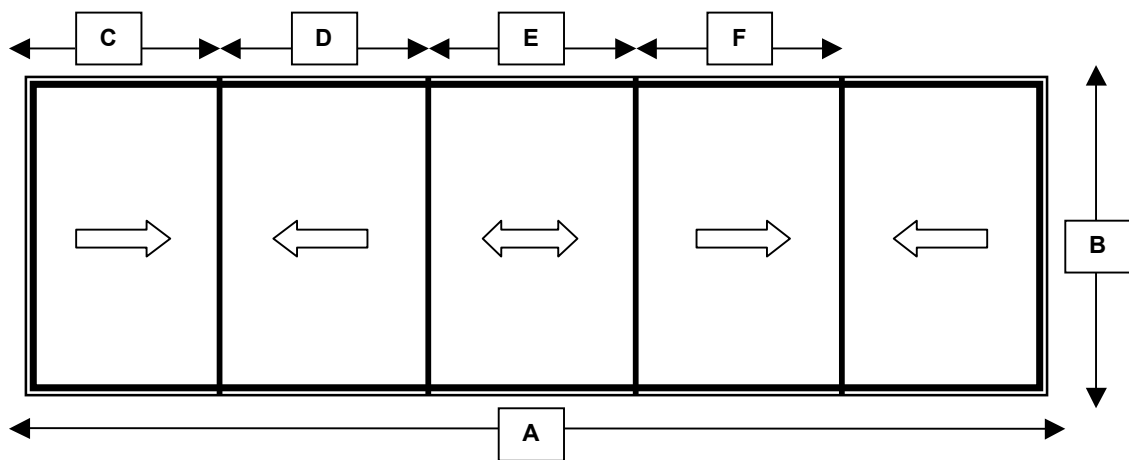

5 Pane Horizontal Slider (SS5) or 6 Pane Horizontal Slider (SS6)

1. Measure A total wall to wall width and minus 10mm (e.g. 2500mm becomes 2490mm)
2. Measure B total sill to top height and minus 10mm
3. Measure C to the centre of the 1st mullion and minus 5mm (e.g. 500mm becomes 495mm)
4. Measure D from centre 1st mullion to centre of 2nd mullion with no deduction
5. Measure E from centre 2nd mullion to centre of 3rd mullion with no deduction
6. Measure F from centre 3rd mullion to centre of 4th mullion with no deduction

N.B. we do not require fine pane sizes as this will be dictated by total unit width.

If your window is offset or unequal pane sizes, the measuring instructions are the same; this ensures our sections match the primary window sections.

For a 6 pane Horizontal Slider, follow the above instruction; just add the measurement from centre of H to centre of what would be I. With no deductions.

Send us this information (Specifying SS5 or SS6 pane)

Please remember to include the number and type of each window you require and check the height from the floor and the distance from any nearby doors for building regulation requirements. Safety glass may be required